

Tamper Resistant Recessed Décor Double Outlet

PN: DDR12515-WH

In-Wall POWER™ SOLUTIONS

The MIDLITE Tamper Resistant Recessed Décor Double Outlet is a first of its kind wiring device that provides recessed power for home and business applications.

Using a standard 18 cubic inch electrical box, the Recessed Décor Double Outlet allows installers to push flat panels or furniture closer to the wall.

Recessed Power

The overmolded casing recesses the receptacle 1 inch into the wall.

Even bulky power cords can be inserted and recessed into the wall.



Installation

The Recessed Duplex Outlet fits into a standard 18 cubic inch electrical box.

The included screw hardware and wall plate finish the installation and provide a clean professional appearance.

Parts Included:

- (1) Tamper Resistant Recessed Décor Double Outlet
- (1) Décor wall plate
- (2) Slotted Decor Screws
- (2) Multi-head Fastening Screws
- (1) Installation Instructions

PN: DDR12515-WH
Conforms to STD 514D and Certified CSA STD 22.2 No. 42.1-00
Electrical Rating: 125 VAC, 15 AMPS, 60 Hz
Minimum Conductor Size: 14 Gauge
Max Operating Temperature: 90° C
Patented with multiple patents pending.



www.midlite.com

115 Wordell St. Fall River, MA 02721

Tel: 508.676.5169 / Toll Free: 800.606.5169 / Fax: 508.861.0105

 **MIDLITE**®
QUALITY CUSTOM PRODUCTS

Notice: Made for installation by a qualified person in accordance with national and electrical codes.

Warning: Risk of electrical shock and death, disconnect power before installation.

CAUTION: USE COPPER CONDUCTORS ONLY: 15AMP, 14AWG to 12AWG

- Remove insulation from conductor end 5/8".
- Side Wire Wrap conductor securely, tighten to 9-12 pound inch of torque
- Push Wire: Use solid # 14 AWG for 15 AMP branch circuit ONLY.


Part Number:

DDR12515-XX

Color = XX:

- W= White
- I = Ivory
- A = Almond
- B = Black
- LA = Light Almond
- BR = Brown

Visit midlite.com to learn more.

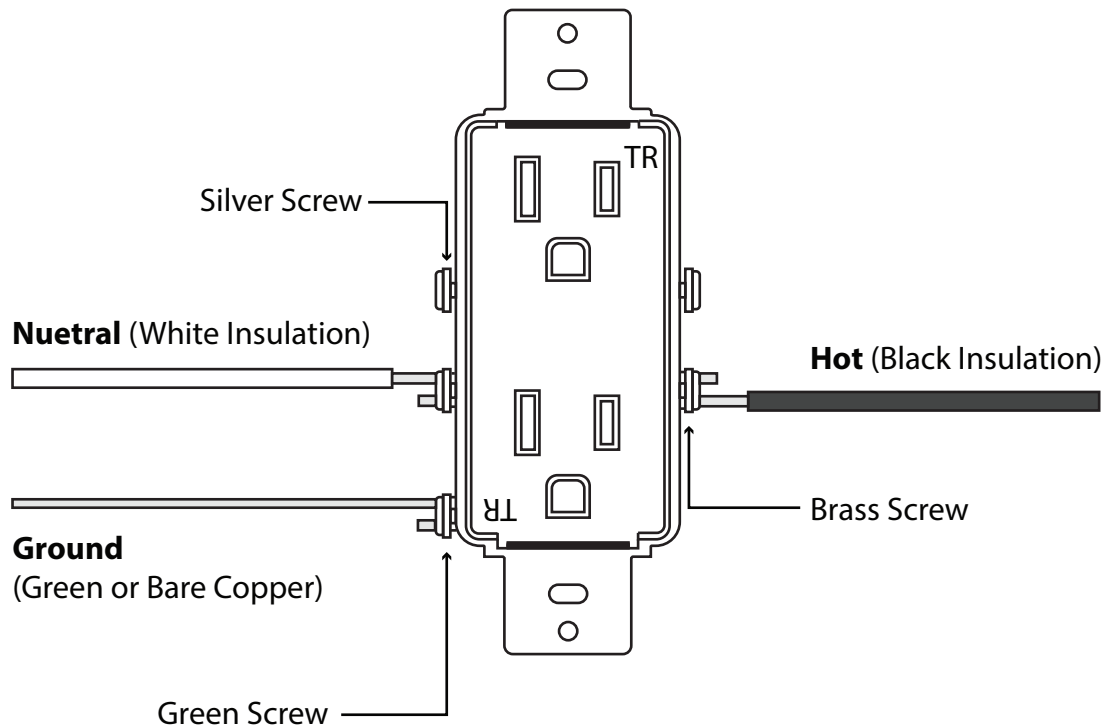

PN: DDR12515-WH
Conforms to STD 514D and Certified CSA STD 22.2 No. 42.1-00
Electrical Rating: 125 VAC, 15 AMPS, 60 Hz
Minimum Conductor Size: 14 Gauge
Max Operating Temperature: 90° C
Patented with multiple patents pending.

