

Power Jumper IC[™] HDTV Power Relocation Kit with Interconnect PN: M2PICTVW15

The Power Jumper IC[™] HDTV Power Relocation Kit easily conceals power & A/V cables within the wall for a flat panel display. The kit is pre-wired, recessed and features are a low profile in-wall jumper that can simply be fed behind the wall and through 1" diameter holes.











The Kit Includes:

- (2) 2-Gang Pocket Plate with pre-installed Décor Brush Plate
- (1) Overmolded Décor Receptacle
- (1) Overmolded IEC Power Inlet
- (1) 15' Interconnect Jumper
- (1) 6' Right Angle IEC Power Cord
- (8) Mounting Screws (#8 5/16)
- (2) Interconnect Strain Relief Bracket





PN: M2PJCTVW5 Conforms to STD 514D and Certified CSA STD 22.2 No. 42.1-00 Electrical Rating: 125 VAC, 15 AMPS, 60 Hz Meets UL 817 & CSA#22.2#21 Interconnect meets UL 2256, 2459 Meets NEC 2014 Article 400.7 (A)(11) Patented with multiple patents pending.






www.midlite.com 115 Wordell St. Fall River, MA 02721 Tel: 508.676.5169 / Toll Free: 800.606.5169 / Fax: 508.861.0105



Power Jumper ICTM HDTV Power Relocation Kit with Interconnect PN: M2PJCTVW15

Installed View

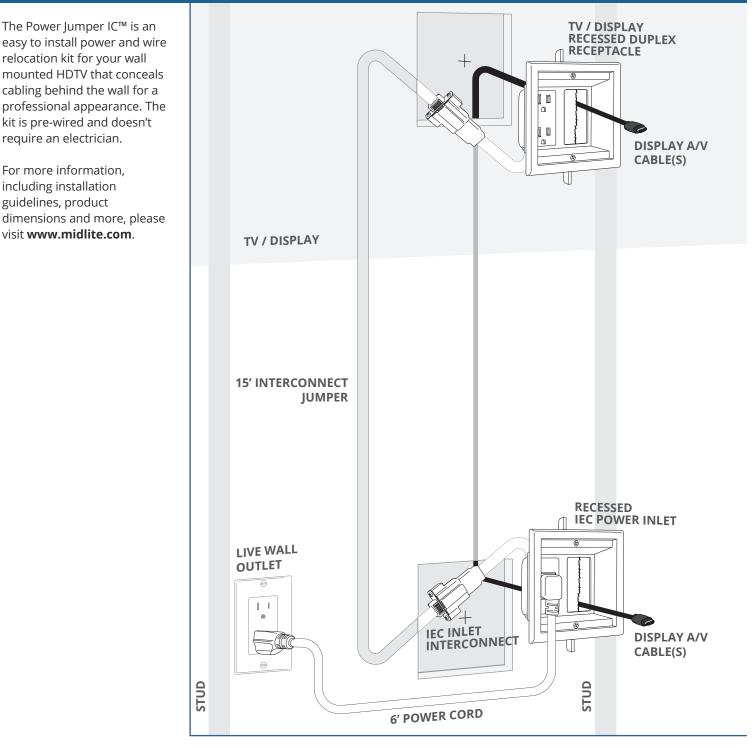

PN: M2PJCTVW15 Conforms to STD 514D and Certified CSA STD 22.2 No. 42.1-00 Electrical Rating: 125 VAC, 15 AMPS, 60 Hz Meets UL 817 & CSA#22.2#21 Interconnect meets UL 2256, 2459 Meets NEC 2014 Article 400.7 (A)(11) Patented with multiple patents pending.





